
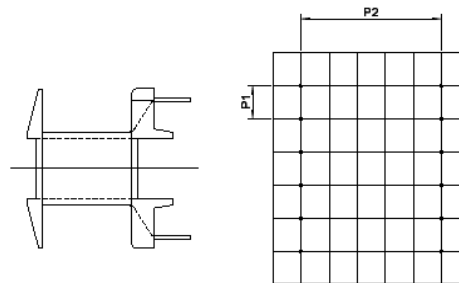


EI TYPE

寸法単位:mm

ホビン型式	TYPE	A	B	C	D	E	F	X	Y	Z	ΦP	P1	P2	端子数
EI20-A010	1	13.7	6.8	9.0	15.5	5.0	7.3	20.0	15.5	17.0	□0.48	3.75	12.5	10
EI22-A0□□	1	15.0	8.4	8.5	15.0	4~7.6	8.4	21.0	15.0	14.6	0.8	5.0	10.0	8
EI22-A00□	1	12.6	7.6	8.5	12.6	7.5~12.5	7.8	12.6	18.3	13.0	0.7	4.0	14.0	6
EI22-A012	1	15.0	8.3	9.2	15.0	3.6	8.3	32.0	15.4	22.2	0.8	-	11.43	12
EI22-Q000	1	12.0	7.7	10.7	13.0	4.9	7.7	26.8	13.0	19.7	0.8	5.0	10.0	8
EI22-Q004	1	12.0	7.5	9.1	13.0	3.8	7.5	21.0	13.0	19.2	0.8	5.0	10.0	6
EI25-A00□	1	17.5	9.0	10.0	17.5	4.0	9.0	25.0	17.5	19.5	0.8	5.0	12.5	8
EI25-A00□	1	17.5	9.0	10.0	17.5	3.0	9.0	20.0	17.5	18.4	0.8	2.5	13.5	8
EI25-A00□	1	13.7	8.5	10.0	φ16.0	5.5	8.85	20.9	21.3	22.9	□0.56	5.0	15.0	10
EI25-A004	1	13.7	8.3	10.0	φ15.8	5.5	9.4	20.9	19.8	19.4	□0.56	15.0	15.0	4
EI25-A008	1	17.5	9.0	10.0	φ18.7	5.0	9.0	22.0	20.6	19.5	□0.64	5.08	15.6	8
EI25-Q□□□	1	14.0	8.5	10.0	14.0	5.35	8.5	29.0	18.5	21.25	0.8	7.50	15.0	6
EI-25用水平ホビン	1	14.0	8.5	10.0	14.0	5.0	8.65	27.0	17.0	21.75	平端子	7.50	15.0	4
EI-28型	1	18.5	9.2	9.8	22.0	6.75~13.0	13.0	24.7	23.0	14.8	0.8	5.0	17.5	10
EI28-A0□□	1	18.5	9.2	9.8	22.0	6.75~13.0	13.0	24.7	23.0	14.8	0.8	5.0	17.5	10
EI30-A0□□	1	19.0	12.9	14.0	19.0	4.4~12	12.9	25.0	23.0	22.5	0.8	4.0	20.0	12
EI30-A004	1	19.0	13.0	12.0	19.0	9.0	13.0	19.0	22.0	18.1	1.0	10.0	18.0	4
EI30-A016	1	19.8	12.8	14.0	25.5	5.0	13.4	40.0	25.5	26.5	1.0	5.0	22.5	16
EI-30型ホビン	1	19.0	12.9	14.0	19.0	15.0	12.9	25.0	23.0	18.3	0.8	19.0	20.0	4
EI-30型ヨイルホビン	1	19.0	13.1	14.0	19.0	8.2~15.0	13.1	25.0	23.0	18.3	0.8	5.0	20.0	10
EI35-A0□□	1	24.0	12.6	15.1	25.0	7.0	12.6	32.0	25.5	23.6	0.8	5.0	20.0	10
EI40-A0□□	1	25.4	14.5	17.0	30.0	9.5~17.0	14.5	25.4	30.0	24.0	0.8	5.0	25.0	10
EI40-A0□□	1	26.6	15.5	17.0	φ30.0	6.0	14.5	30.0	31.0	24.0	1.0	5.0	25.0	12
EI40-Q□□	1	27.0	14.4	17.0	27.0	5.0	14.4	40.0	27.0	34.0	1.0	10.0	20.0	8
EI40ピン付	1	27.0	14.4	17.0	27.0	7.0	14.4	50.0	35.0	33.6	1.0	7.0	30.3	12
EI42-S004	1	26.0	14.6	11.7	28.0	9.5~11.5	17.6	26.0	36.0	16.2	1.0	10.0	30.0	4
EI42-Q004	1	26.0	14.6	12.1	28.0	5.5	17.6	26.0	36.0	24.6	1.0	10.0	30.0	4
EI44-A016	1	30.5	14.1	19.6	34.0	7.5	17.4	40.0	34.0	33.1	1.0	5.0	27.5	16
EI50-A0□□	1	34.0	17.3	21.0	35.0	6.0~11.0	17.3	43.5	37.5	35.0	1.0	7.5	27.5	12
EI50-A0□□	1	34.0	17.3	21.0	49.5	7.0	33.0	43.5	49.5	34.0	1.0	7.5	42.0	12
EI60-A0□□	1	44.0	19.5	24.0	43.0	4.5~5.0	19.5	51.0	43.5	39.0	1.0	9.0	37.5	12

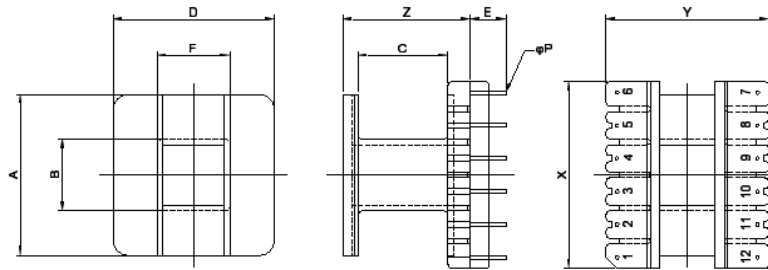

TYPE 1